

SISTEM Armonica Bi-fold

USI

Sistem de usi pliante cu o adancime a tocului de 73 mm cu performante termice si acustice excelente, ideal pentru climate moderate.

CARACTERISTICI

Coefficient de transfer termic  $U_w \geq 1,1$ (W/m²K)

Permeabilitate la aer  Clasa 4


Etanseitate la apa  Clasa 9A

Rezistenta la vant  Clasa A3

Test de securitate   Apt

Test de referinta AEV 2.700 x 2.530 mm / 3 canate

Test de securitate: Configuratie 330. 2701 x 2517 mm / 3 canate

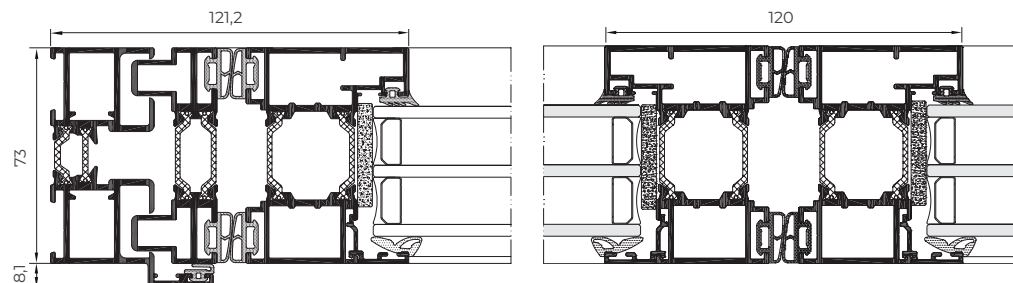

POSIBILITATI DE DESCHIDERE



Deschidere interioara

De 1 a 14 cercevele

Deschidere exteriora

De 1 a 14 cercevele

Colt la 90° fara montanti

POSIBILITATI



FERONERIE
ASCUNSA



ACCESIBILITATE

Sectioni

Toc 73 mm, Cercevea 73 mm

Latime Poliamida

Toc 20 mm

Cercevea 30 mm

Grosime Profil

Usa 1,8 mm

Vitrare

Max. 45 mm, Min. 25 mm

Dimensiuni maxime cercevea

Latime (L) 1200 mm, Inaltime (H) 3000 mm

Greutate maxima cercevea

120 kg

Consultati greutatea si dimensiunile maxime conform tipologiei

