


Sistem cu balamale de 60 mm adancime a tocului, echipat cu poliamide de 24 mm, care ofera un transfer termic optim si un confort acustic, obtinand o atenuare a zgomotului de pana la 48 dB.

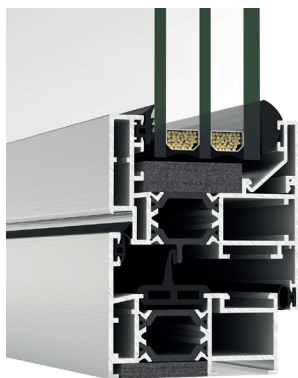

Sectioni

Toc 60 mm, Cercevea 68 mm

Latime Poliamida

24 mm

Grosime Profil

Fereastră 1,6 mm

Usa 1,6 mm

Vitrare

Max. 46 mm, Min. 5 mm

Dimensiuni maxime cercevea

Latime (L) 1500 mm, Inaltime (H) 2600 mm

Greutate maxima cercevea


160 kg

Consultati greutatea si dimensiunile maxime conform tipologiei

Posibilitati estetice:

Cercevea: Dreapta sau curbata

Bagheta: Dreapta sau curbata

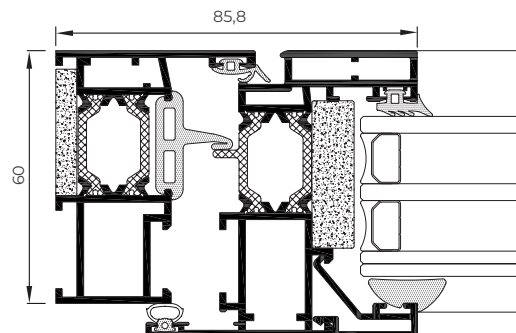

POSIBILITATI



FERONERIE
SIGURANTA




FERONERIE
ASCUNSA



ACCESIBILITATE

POSIBILITATI DE DESCHIDERE

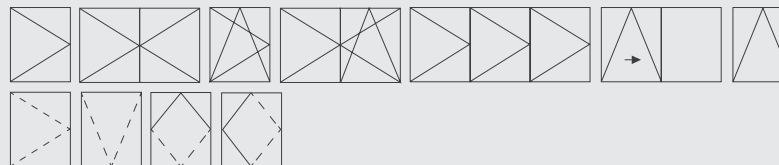

Deschidere interioara

Batanta
Oscilo-batanta
Plianta
Oscilo-paralela
Oscilanta

Deschidere exteriora

Batanta
Proiectanta-glisanta
Pivotanta cu fixare pe orizontala si verticala

CARACTERISTICI

Coefficient de transfer termic  $U_w \geq 1,0 \text{ (W/m}^2\text{K)}$

Izolare acustica  R_w pana la 48 dB

Permeabilitate la aer  Clasa 4

Etanseitate la apa  Clasa E1350

Rezistenta la vant  Clasa C5

Test de referinta 1,20 x 1,16 m / 2 foi

