


Sistemul oscilo-batant cu canal european are o capacitate pentru un pachet de sticla de 31 mm. Grosimea profilelor de 1,5 mm in versiunea cu fereastre si 1,7 mm in versiunea de usa, ii confera rigiditate si durabilitate exceptionala.

CARACTERISTICI

Coeficient de transfer termic		$U_w \geq 1,8$ (W/m ² K)
Izolare acustica		Rw pana la 39 dB
Permeabilitate la aer		Clasa 4
Etanseitate la apa		Clasa 9A
Rezistenta la vant		Clasa C5

Test de referinta 1,20 x 1,18 m / 2 foi

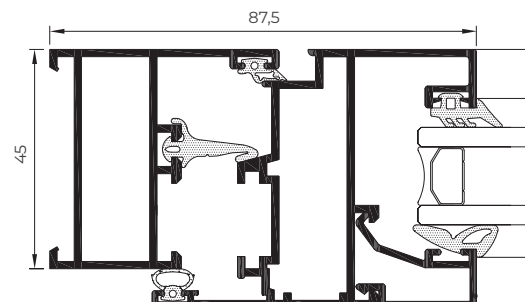

POSSIBILITATI




FERONERIE
SIGURANTA



FERONERIE
ASCUNSA

POSSIBILITATI DE DESCHIDERE

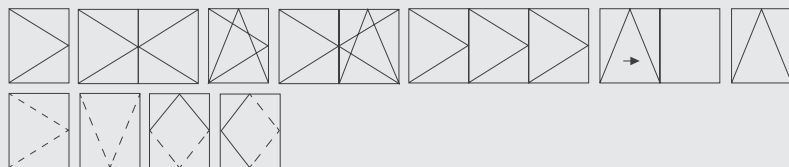

Deschidere interioara

Batanta
Oscilo-batanta
Plianta
Oscilo-paralela
Oscilanta

Deschidere exteriora

Batanta
Proiectanta-glisanta
Pivotanta cu prindere orizontala
sau verticala

Sectiuni

Toc 45 mm, Cercevea 53 mm

Grosime Profil

Fereastră 1,5 mm

Usa 1,7 mm

Vitrare

Max. 31 mm, Min. 3 mm


Dimensiuni maxime cercevea

Latime (L) 1500 mm, Inaltime (H) 2400 mm

Greutate maxime cercevea

120 kg

Consultati greutatea si dimensiunile maxime conform tipologiei



Posibilitati estetice:

Cercevea: Dreapta sau curbata

Bagheta: Dreapta sau curbata