



Acest sistem de glisanta, disponibila atat in versiunea cu ridicare cat si in versiunea standard, devine solutia ideala pentru inchiderea golurilor mari. Prezinta o estetica moderna cu linii drepte, un nod central redus si suprafete mari de sticla care asigura incaperi pline de lumina si confort, asta si datorita performantelor sale termice si acustice remarcabile.

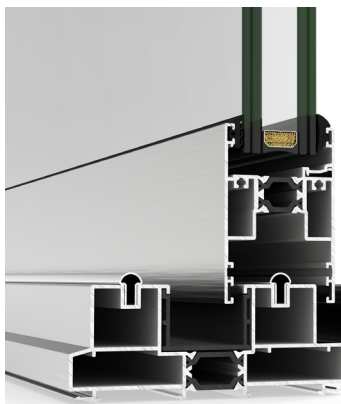

Glisanta Standard

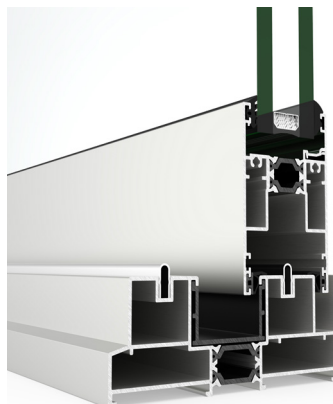

Glisanta cu Ridicare

CARACTERISTICI


Coeficient de transfer termic		$U_w \geq 1,1$ (W/m ² K)
Izolare acustica		Rw pana la 40 dB
Permeabilitate la aer		Clasa 3* / 4**
Etanseitate la apa		Clasa 7A
Rezistenta la vant		Clasa C5* / C2**
Test de securitate		Apt

* Test de referinta standard 1,8 x 2,2 m / 2 foi

** Test de referinta cu ridicare 4,0 x 2,50 m / 2 foi

Test de siguranta: Test de referinta 2,40 x 2,40 m / 2 foi

POSSIBILITATI DE DESCHIDERE

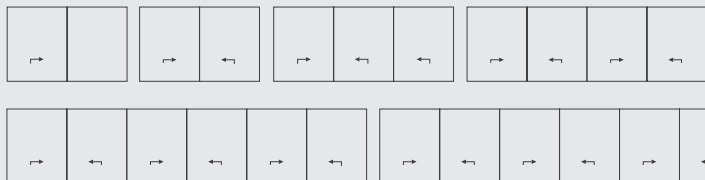

Glisanta

Singura cale de rulare (foaie + fix)


2, 3 si 4 cai de rulare

Galandaj

POSSIBILITATI



ACCESIBILITATE

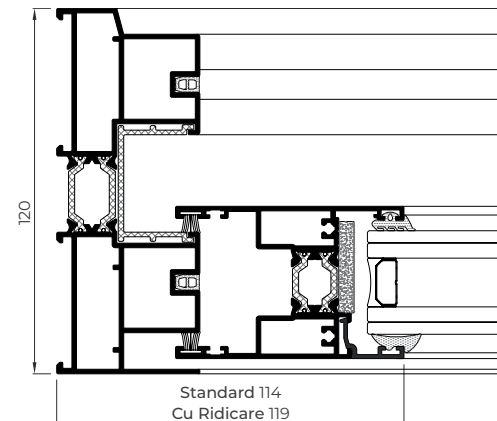



4700 GLISANTA

Sectioni

Toc 115 si 120 mm, 185 mm 3 cai de rulare

Cercevea 50 mm

Latime Poliamida

20-25 mm

Grosime Profil

Usa balcon 1,5 mm

Vitrare

Max. 36 mm, Min. 26 mm

Dimensiuni maxime cercevea

Latime (L) 2500 mm, Inaltime (H) 3000 mm

Greutate maxima cercevea

Standard 280 Kg

Cu ridicare 300 Kg

Consultati greutatea si dimensiunile maxime conform tipologiei